Smart Vibration Monitor 9034 & 9038 Online/Fixed Vibration Monitoring

A4 Smart Vibration Monitor 9034 & 9038 TAW 0415

Features:

- 4 accelerometer channel & 8 accelerometer channel versions
- 24VDC (relay drive) switched output for each channel (warning/critical, g or velocity)
- 4 to 20mA output for each channel (g or velocity)
- Temperature input
- Tacho Input
- USB for connection to Smart Vibration Monitor PC software
- Ethernet socket for connection to Online Vibration analysis software

Advantages:

- Extremely cost effective lowest cost/channel industrial vibration monitor/analyser
- · Very easy to set up using Smart Vibration Monitor PC software
- 24/7 monitoring of critical plant operations


Benefits:

Single low-cost unit monitors plant with local alarms, connects to high functionality PC analysis software AND connects to cloud-based monitoring and analysis software.

The Smart Vibration Monitor 9034 and Smart Vibration Monitor 9038 are the new generation of low price-high performance installed vibration analysers from TPI. With up to 8 accelerometer inputs, 8 digital outputs, 8 analogue outputs, temperature and tacho inputs as well as USB and Ethernet connectivity the Smart Vibration Monitor 9034 and Smart Vibration Monitor 9038 modules offer unrivalled price/per channel performance. The analysers can be used in several different ways:

- Standalone Operation Connect up to 8 accelerometers and up to 8 relays and instantaneously monitor and alarm on-key vibration points. Using the included Smart Vibration Monitor PC software the alarms can each independently be set to trigger on/either a velocity level or a g level. If a tacho is connected, a speed range can be set so as not to activate during machine start-up or shut-down.
- Legacy Systems Operation for each connected accelerometer, the Smart Vibration Monitor units can also output levels of vibration (g or velocity) as 4 to 20mA signals for connection to existing monitoring systems such as PLCs, etc.

- **PC Operation** If a laptop/PC is connected via a USB cable, up to 64 modules can be monitored and the vibration levels displayed on screen. With the PC connected more detailed vibration analysis can be carried out with up to 51,200 line FFT analysis.
- **Online Cloud Operation** by subscribing to TPI's Data Decypher cloud-based service all installed modules can be monitored and analysed from a single web-based interface. Just log on via your standard internet browser and all modules can be viewed and configured. Furthermore, detailed reporting is just a click away, as is automatic alarm notification via email.

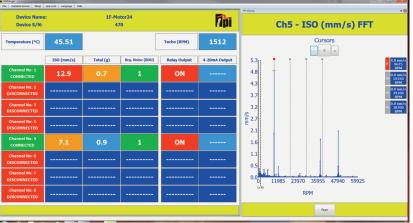

The Smart Vibration Monitor 9034 and Smart Vibration Monitor 9038 modules are supplied to work in any, or all, modes right out of the box so it truly is a system that will grow with your requirements.

The Smart Vibration Monitor modules are perfect for extremely cost-effective monitoring of critical plants operations and when used in conjunction with the TPI 9070, 9080 and 9041, vibration analysers provide the complete CBM soluition.

Test Products International, Inc



Online/Fixed Vibration Monitoring

| | Smart Vibration Monitor 9034 | | Smart Vibration Monitor 9038 |
|-----------------------------------|---------------------------------|---|---------------------------------|
| Measurement | | | |
| IEPE Accelerometer Input Channels | 4 | | 8 |
| Accelerometer Sampling Frequency | | 2Hz - 25.6kHz | |
| 4-20mA Output Channels | 4 | | 8 |
| 24VDC Digital Outputs | 4 | | 8 |
| 24VDC Dig. Output Current Max | | 100mA | |
| Digital Output Alarm | | Acceleration or Velocity (Channel Selectable) | |
| Tachometer Input | | 1 (OV to any voltage upto +24VDC) | |
| Frequency Dependent Alarms | | Yes (using Tachometer) | |
| Temperature Input | | 1 (Typically 10mV/°C) | |
| PC Connection | | USB | |
| Internet/Cloud Connection | | Ethernet | |
| PC Software | | | |
| Vibration Alarms | 4 | Vibration | 8 |
| Temperature Alarm | 1 | Temperature | 1 |
| Alarm Choice | | Acceleration AND/OR Velocity (channel selectable) | |
| FFT | | Up to 51,200 lines | |
| Time Waveform | | Yes | |
| Electrical | | | |
| Supply Voltage | | USB or 24VDC | |
| Supply Current | | 500mA | |
| Mechanical | | | |
| Environmental | | IP50 | |
| Operating Temperature °C | | 0-55°C (32-151°F) | |
| Storage Temperature °C | | 0-55°C (32-151°F) | |
| Mounting | | DIN Rail | |
| Part Number | 9034 | | 9038 |

Test Products International World Wide Locations

Test Products International USA 9615 SW Allen Boulevard Beaverton, OR 97005

Email: tech@tpi-thevalueleader.com Test Products International Canada 342 Bronte St. South Unit #9 Milton, Ontario L9T 5B7

> Email: info@tpicanada.com

Test Products International Europe Ltd. Longley House International Drive Crawley RH10 6AQ Email: sales@tpieurope.com **TPI-AsiaPacific Co., Ltd.** 58 Gaetbeol-ro, Yeonsu-gu, Incheon, Korea

Email: sales@tpiasiapacific.com

Test the TPI Advantage

www.tpieurope.com